

## Integre pro scan.

The pattern scanning multi-color photocoagulator that puts you in control

LASER TRABECULOPLASTY

LASER IRIDOTOMY

Helping the world see clearly

# Transforming retinal photocoagulation — effectively, efficiently


With Integre Pro Scan<sup>™</sup> from Ellex, you can transform the efficacy and efficiency of retinal photocoagulation. At the touch of a button, the system can deploy a comprehensive choice of patterns that are spaced, shaped and positioned consistently and precisely for the accurate and efficient treatment of retinal disease.

Choose Integre Pro Scan<sup>™</sup> and you'll be able to treat patients up to twice as quickly than is possible with conventional single-spot photocoagulation.

#### **Uniform energy distribution**

Integre Pro Scan's proprietary dual-mode laser cavity delivers uniform energy distribution across the full spot diameter, eliminating hotspots and achieving optimal, homogenous burns.

It's a key feature that means you can achieve consistent, predictable treatment outcomes across a broad range of pathologies.

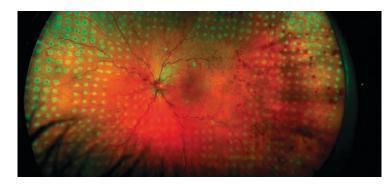

Integre Pro Scan<sup>™</sup> delivers uniform energy distribution



# A pattern and wavelength for every pathology

Integre Pro Scan<sup>™</sup> from Ellex combines multi-color photocoagulation with a precise computer-controlled pattern scanning laser in an ergonomically advanced all-in-one laser/slit lamp design.

Whether positioning focal treatment in the macular area, or performing PRP in the periphery, Integre Pro Scan<sup>™</sup> provides a comprehensive pattern and wavelength choice to cover all retinal pathologies. YELLOW-RED CONFIGURATION (561 nm and 670 nm)

GREEN-RED CONFIGURATION (532 nm and 670 nm)


GREEN CONFIGURATION (532 nm)

YELLOW CONFIGURATION (561 nm)

With Integre Pro Scan<sup>™</sup>, the following wavelength

configurations are available:

### Wavelength Clinical Characteristics

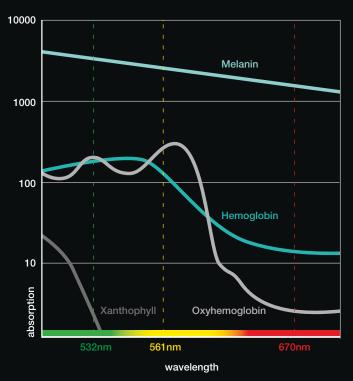

#### **True Spot Optics**

Integre Pro Scan's enhanced
True Spot™ optical system
gives you a clearer view of the
fundus. It's a system that delivers
excellent visualization and
illumination, alongside enhanced
depth perception and a wider
peripheral view.

When it's combined with an optimal red-reflex, it's also a solution that enables you to titrate power levels precisely to deliver highly accurate treatment.

#### **Fluence Assist**


With the incorporation of Fluence Assist™, Integre Pro Scan™ is able to automatically calculate the fluence output at the chosen parameter settings.

As you titrate power, spot size and/or pulse duration the fluence measurement is recalculated — thereby ensuring that you are always aware of the amount of energy being delivered to the treatment site.

## Specifications

Laser Source	Solid-state laser diode and cavity (ZenTec™)
Wavelength	<ol> <li>Yellow-red configuration: 561 nm and 670 nm</li> <li>Green-red configuration: 532 nm and 670 nm</li> <li>Yellow configuration: 561 nm</li> <li>Green configuration: 532 nm</li> </ol>
Power at the Cornea	Red: 50 – 1000 mW, Yellow: 30° – 1500 mW, Green: 30°– 1500 mW
<b>Exposure Time</b>	Pattern: 10, 20, 30, Single Spot: 0.01 to 8.0 seconds
Patterns	Linear (2 to 7 spots)  Rectangle (2×3, 2×4, 2×5, 2×6, 2×7)  Square (2×2, 3×3, 4×4, 5×5, 6×6)  Triangle (3, 6, 10, 15, 21 and 28 spots)  Circle – filled (7, 12, 19, 27 and 37 spots)  Circle – empty (12, 18, 24 and 30 spots)  Single Half Circle (4, 7 and 10 spots)  Double Half Circle (11, 17 and 23 spots)  Circle Sector 60 (3 to 7 spots)  Circle Sector 120 (5, 7, 9 and 11 spots)  Double Circle Sector 60 (5, 7, 9 and 11 spots)  Double Circle Sector 120 (8, 12, 16 and 20 spots)  Variable curve, double curve and filled sector

Spot Size	Pattern: 100 to 500 μm, continuously variable Single Spot: 50 to 1000 μm, continuously variable
Spot Spacing	Pattern: 0 (touching), 0.25, 0.5, 0.75, 1.0, 1.25, 1.5, 1.75, 2.0 spot-width Single Spot: N/A
Pulse duration	Pattern: 10, 20, 30 ms Single Spot: 10 – 8000 ms
Repeat Mode	Pattern: N/A, Single Spot: 50 – 1000 ms
Aiming Beam	Red 635 nm, adjustable intensity
Magnification	6x, 10x, 16x, 25x, 40x
Cooling	Air cooled
Electrical Requirements	100-240 VAC, 50/60 Hz, 800 VA
Weight	35kg, 77 lbs. (laser only)
Dimensions (HxWxD)	62 x 76 x 47 cm, 24 x 30 x 19 inches (laser only)

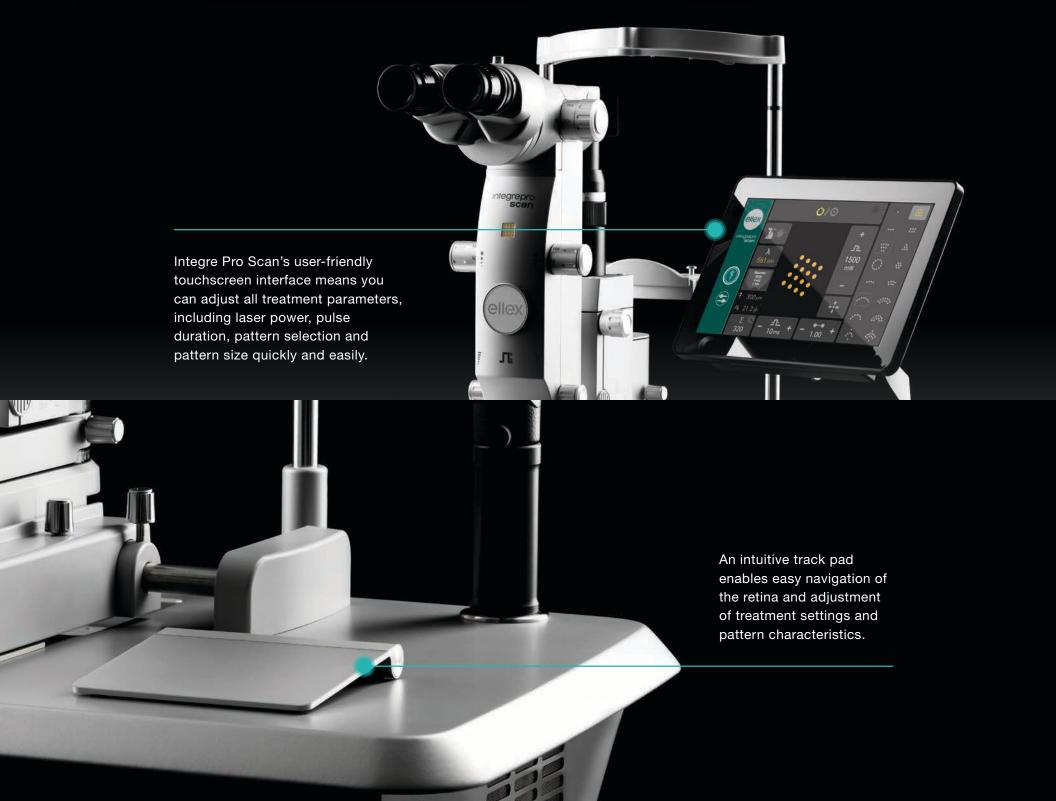

### integre pro scan.



Find out how Integre Pro Scan™ will help you set new standards in deploying laser photocoagulation in the treatment of retinal disease.

#### Contact us now to schedule a demonstration

#### **Head Office**

3 Second Avenue Mawson Lakes, SA, 5095 AUSTRALIA +61 8 7074 8200

#### **Registered Office**

82 Gilbert Street Adelaide, SA, 5000 AUSTRALIA +61 8 7074 8200

© 2018, Ellex Medical Pty Ltd. Integre Pro Scan, Fluence Assist, True Spot, Total Solution and Power Control are trademarks of Ellex Medical Pty Ltd. Ellex is a registered trademark of Ellex Medical Pty Ltd. International patents pending and/or granted.

#### Ellex Inc. (USA)

7138 Shady Oak Road Minneapolis, MN, 55344 USA 800 824 7444

#### Ellex iTrack

41316 Christy Street Fremont, CA, 94538 USA 800 391 2316

#### **Ellex Deutschland GmbH**

ZPO floor 1. Carl-Scheele-Str.16 12489 Berlin GERMANY +49 30 6392896 00

#### **Ellex France SARL**

La Chaufferie – 555 chemin du bois 69140 Rillieux la Pape FRANCE +33 4 8291 0460

#### Ellex Inc. (Japan)

Harumi Center Bldg 5F, 2-5-24 Harumi Chuo-ku Tokvo 104-0053 JAPAN +81 3 5859 0470

#### Ellex Australia

3 Second Avenue Mawson Lakes, SA, 5095 AUSTRALIA +61 8 7074 8200









